

S29JL064H Simultaneous Read/Write Flash Memory

64 Megabit (4 M x 16-Bit / 8 M x 8-Bit)

Spansion™ Overview

Spansion™, the Flash memory subsidiary of AMD and Fujitsu, is the world's leading manufacturer of NOR Flash Memory. Spansion is committed to delivering outstanding customer service and expert technical support, as well as providing the highest level of quality and reliability in its products. All Spansion production fabs are certified to the demanding ISO/TS16949:2002 global technical specification, ISO9001:2000 quality standards, and the ISO14001 environmental standard.

General Description

Spansion S29JL064H devices, manufactured using 130-nanometer, high-volume production Floating Gate technology, are standard interface devices featuring simultaneous read/write capability and high reliability. Several packages are available, offering the widest variety for all applications.

Target Applications

- Automotive
- Gaming Devices
- Industrial Equipment
- Wireless Devices
- Telecom/Networking
- Consumer Electronics

PERFORMANCE CHARACTERISTICS

ACCESS SPEED

Max. Access Time (ns)	55	60	70	90
Max. CE# Access Time (ns)	55	60	70	90
Max. OE# Access Time (ns)	25	25	30	35

CURRENT CONSUMPTION

Active Read (@ 5 MHz) (mA)	10
Program or Erase (mA)	15
Read While Program (mA)	21
Standby Mode (µA)	0.2

Note: Typical values shown.

PROGRAM & ERASE PERFORMANCE

Accelerated Byte or Word Program Time (µs)	4
Byte Program Time (µs)	4
Program Time (µs)	6
Sector Erase Time (sec)	0.4

Note: Typical values shown.

FEATURES AND BENEFITS

- **Based on Proven Floating Gate Technology**
- **Highest Performance Simultaneous Read/Write Flash at 64 Mb in the Industry**
 - Fastest word & chip programming time
- **High Performance Read**
 - Up to 55ns Random Access, up to 4 µs Word Program (accelerated)
- **Highest Quality and Reliability in the Industry**

DISTINCTIVE CHARACTERISTICS

ARCHITECTURAL

- Established 130nm Floating Gate technology
- Single 3.0V power supply
- Four banks for simultaneous read write operations
 - Bank 1: 8 Mb
 - Bank 2: 24 Mb
 - Bank 3: 24 Mb
 - Bank 4: 8 Mb
- Industrial operating temperature range
 - Industrial -40 °C to +85 °C
- JEDEC pinout and software standards compliant

SOFTWARE AND HARDWARE

- Program and Erase Suspend and Resume
- CFI (Common Flash Interface) compliant
- ACC pin accelerates factory programming

SECURITY

- Sector Protection/Unprotection
- WP# protects top and bottom sectors
- 128-word/256-byte one-time programmable Secured Silicon Sector


QUALITY AND RELIABILITY

- Cycling endurance: 1,000,000 cycles per sector typical
- Data retention: 20 years typical

PACKAGING

- 48-pin TSOP Package
- Standard and Pb-Free packages available

Ordering Information

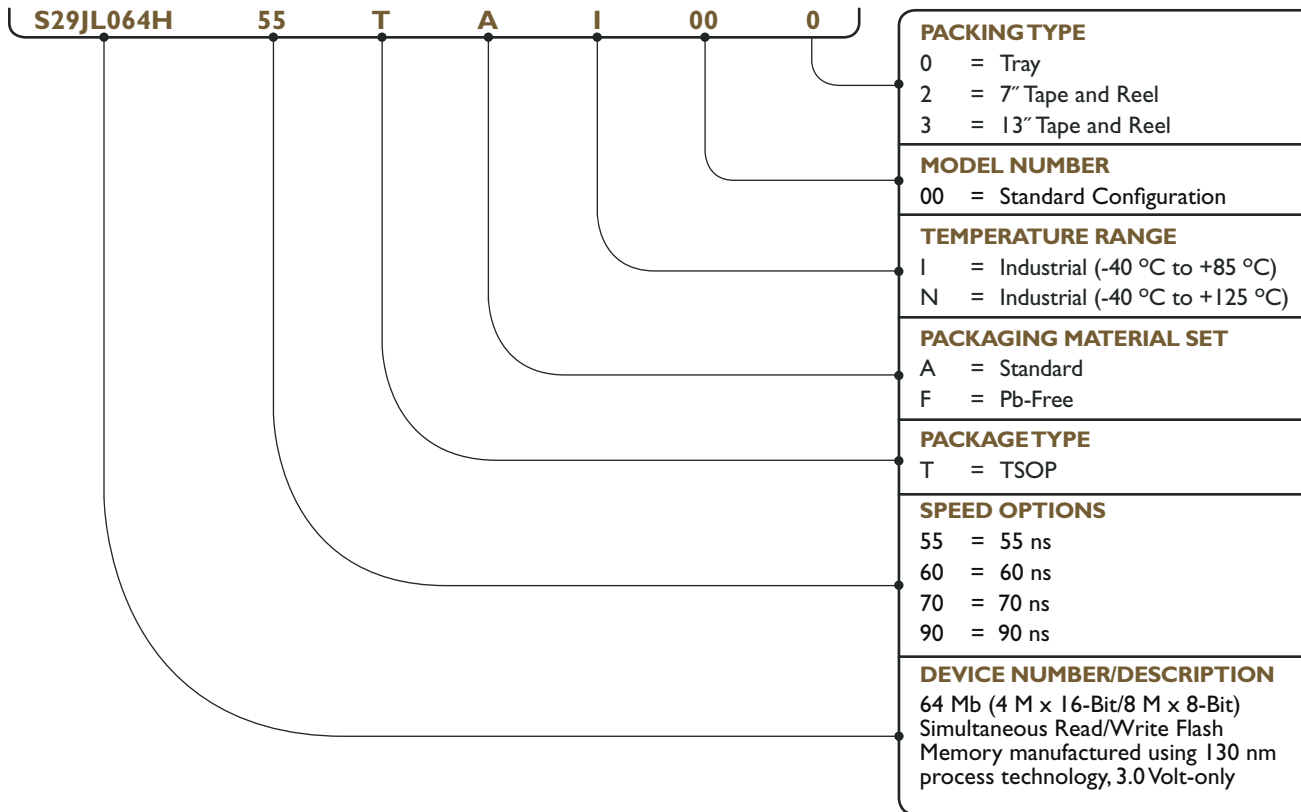

AVAILABLE ORDERING PART NUMBERS FOR S29JL064H FLASH MEMORY

Device Number	Speed Option	Package & Material Temperature	Model Number	Packing Type	Package Description
S29JL064H	55, 60, 70, 90	TAI, TFI	00	0, 2, 3 ¹	TS048 (TSOP) ²
	70, 90	TAN, TFN			

PRODUCT SELECTION GUIDE³

Part Number for New Designs	Legacy Part Numbers (TSOP only)*
S29JL064H	Am29DL640G
	Am29DL640D
	MBM29DL640E
	MBM29DL64DF

Notes:

- Type 0 is standard. Specify others as required: TSOPs can be packed in Types 0 and 3; BGAs in Types 0, 2, or 3.
- TSOP package marking omits packing type designator from ordering part numbers
- Refer to related Spansion OPN map for feature mapping.

* For Fine-pitch BGA (FBGA) designs, Spansion recommends S29PL064J.

SPANSION 915 Deguigne Drive, PO Box 3453 Sunnyvale, CA 94088-3453, USA Tel 408-962-2500 1-866-SPANSION
SPANSION JAPAN 4-33-4 Nishi Shinjuku Shinjuku, Tokyo, 160-0023, Japan Tel. +81-3-5302-2200 Fax +81-3-5302-2674